


Fixed radio button

The fixed radio button is supplied with batteries installed and ready to go.

Pairing procedure

Open the cabinet using the key provided with the gate and locate the 'operate'. Pressing the 'operate' button either opens or closes the gate. Have the hand transmitter(s) to hand before starting

1. Turn the barrier(s) off
2. While holding down the 'operate' button, switch the barrier on with the internal toggle switch.
3. Release the 'operate' button. (LED flashes slowly)
4. Send a signal from the fixed radio button. After signal sent from a transmitter the cabinet red LED flashes quickly meaning signal recognised and ready to be stored.
5. Wait until LED flashes slowly then press the 'operate' button to store and lock in the transmitter signal.
6. Repeat with the partner barrier of operating as a pair then repeat the whole procedure with a second fixed radio button.
7. Check successful operation by operating barrier with each transmitter.

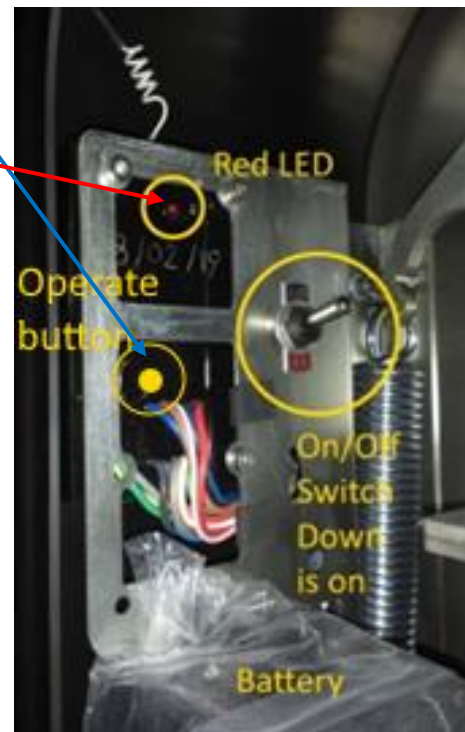

Call 01263 493102 or 07785 352730 if further assistance required